

US-755, US-755/B

Elevador electrohidráulico de tijera
[modelos sobre pavimento]


Electrohydraulic scissor lifts
[Floored models]

CE Made in Italy

US-755/E, US-755/EB

Elevador electrohidráulico de tijera
[modelos empotrados]

Electrohydraulic scissor lifts
[disappearing model]

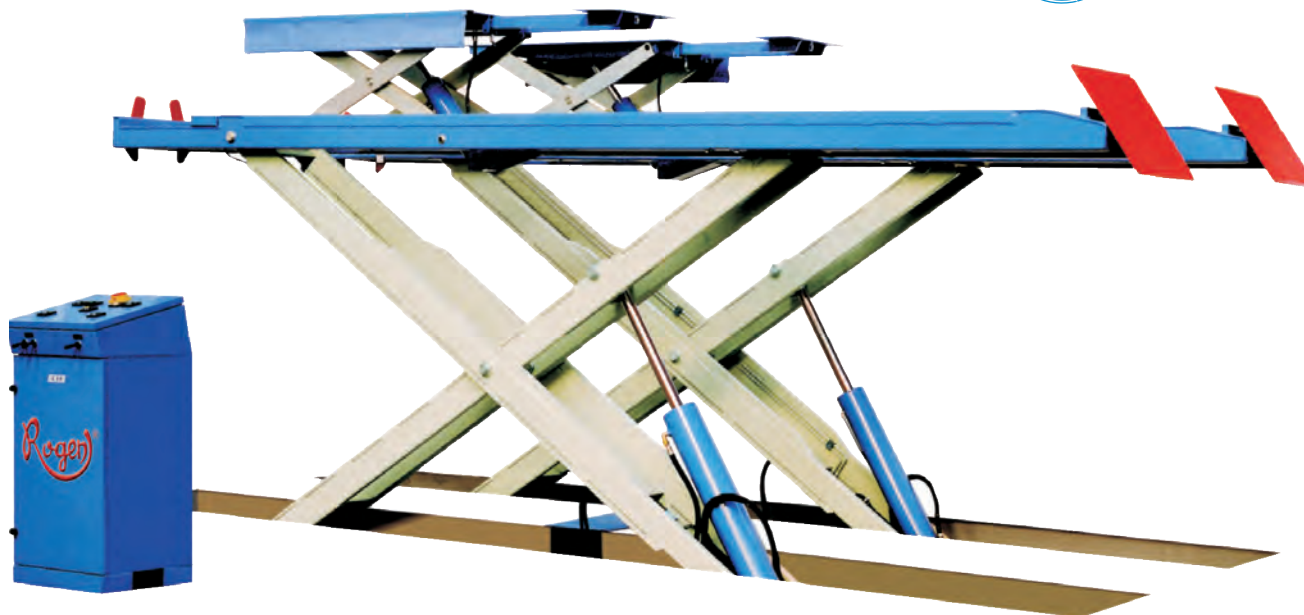


Trazado técnico constructivo

- Ranuras frontales para placas giratorias con placa ajustable cincada.
- Placas dobles oscilantes traseras con superficie antideslizante y zincada.
- Bloqueo y desbloqueo de placas oscilantes mediante un control neumático en la unidad de control principal.
- Sensor de proximidad para un estacionamiento extremadamente preciso.


Technical and structural lay-out

- Front slots for rotating plates with a zinc-plated adjustable plate.
- Rear oscillating double plates with a slip-resistant and zinc-plated surface.
- Locking and unlocking oscillating plates by a pneumatic control on the main control unit.
- Proximity sensor for an extremely precise parking.


Sobre pavimento - Floored model

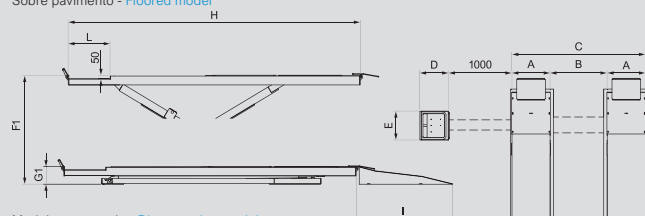

Modelo empotrado - Disappearing model

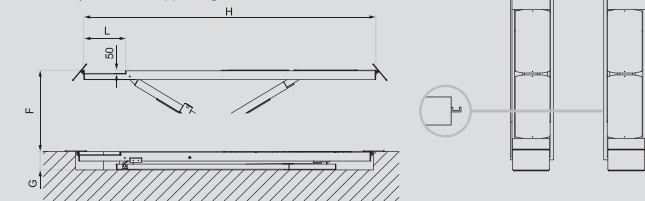

Art.	Capacidad Capacity	Potencia Power	Motor trifásico Three-phase motor	Peso Weight
US-755	5000 Kg	4 Kw	400 V - 50 Hz	2890 Kg
US-755/B	5000 Kg	4 Kw	400 V - 50 Hz	2960 Kg
US-755/E	5000 Kg	4 Kw	400 V - 50 Hz	2600 Kg
US-755/EB	5000 Kg	4 Kw	400 V - 50 Hz	2670 Kg

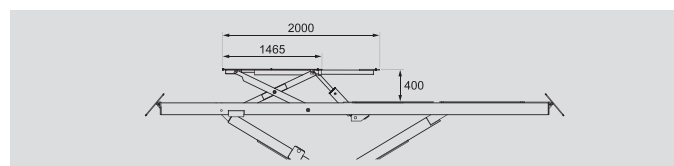

• Capacidad mesa elevadora - Lift table capacity: 4000 Kg

Art.	A	B	C	D	E	F	F1	G	G1	H	I	L
US-755	650 mm	900 mm	2200 mm	500 mm	550 mm	—	1880 mm	—	280 mm	4900 mm	1500 mm	1100 mm
US-755/B	650 mm	900 mm	2200 mm	500 mm	550 mm	—	1880 mm	—	280 mm	5400 mm	1500 mm	1100 mm
US-755/E	650 mm	900 mm	2200 mm	500 mm	550 mm	1800 mm	—	290 mm	—	4900 mm	—	1100 mm
US-755/EB	650 mm	900 mm	2200 mm	500 mm	550 mm	1800 mm	—	290 mm	—	5400 mm	—	1100 mm