

US-992, US-992/C

Elevador electrohidráulico de tijera
[modelos sobre pavimento]



Electrohydraulic scissor lifts
[Floored models]

CE Made in Italy

US-992/E, US-992/EC

Elevador electrohidráulico de tijera
[modelos empotrados]

Electrohydraulic scissor lifts
[disappearing model]

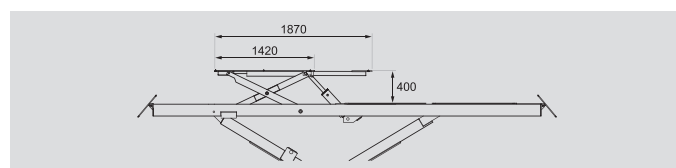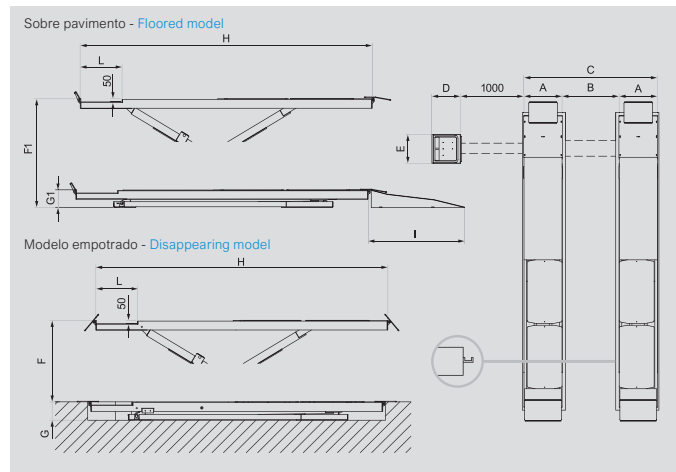

• Capacidad mesa elevadora - Lift table capacity: 3000 Kg

Art.	Capacidad Capacity	Potencia Power	Motor trifásico Three-phase motor	Peso Weight
US-992	4000 Kg	3,3 Kw	400 V - 50 Hz	2390 Kg
US-992/C	4000 Kg	3,3 Kw	400 V - 50 Hz	2440 Kg
US-992/E	4000 Kg	3,3 Kw	400 V - 50 Hz	2100 Kg
US-992/EC	4000 Kg	3,3 Kw	400 V - 50 Hz	2150 Kg

Art.	A	B	C	D	E	F	F1	G	G1	H	I	L
US-992	600 mm	900 mm	2100 mm	460 mm	450 mm	—	1880 mm	—	280 mm	4600 mm	1500 mm	650 mm
US-992/C	600 mm	900 mm	2100 mm	460 mm	450 mm	—	1880 mm	—	280 mm	5100 mm	1500 mm	1100 mm
US-992/E	600 mm	900 mm	2100 mm	460 mm	450 mm	1800 mm	—	290 mm	—	4600 mm	—	650 mm
US-992/EC	600 mm	900 mm	2100 mm	460 mm	450 mm	1800 mm	—	290 mm	—	5100 mm	—	1100 mm

Trazado técnico constructivo

- Placas de detección Big Play con una superficie galvanizada antideslizante.
- Ranuras frontales para placas giratorias con placa ajustable zincada.
- Placas dobles oscilantes traseras con superficie antideslizante y zincada.
- Bloqueo y desbloqueo de placas oscilantes mediante control neumático en la unidad de control principal.
- Sensor de proximidad para un estacionamiento extremadamente preciso.

Technical and structural lay-out

- Big play detector plates with a slip-resistant zinc-plated surface.
- Front slots for rotating plates with a zinc-plated adjustable plate.
- Rear oscillating double plates with a slip-resistant and zinc-plated surface.
- Locking and unlocking oscillating plates by pneumatic control on the main control unit.
- Proximity sensor for an extremely precise parking.