

US-1056

Equilibradora manual motocicletas Manual bike balancer



Indicador nivel
Level indicator

Dotada con 4 conos (Ø 14-35 mm) - Equipped with 4 cones (Ø 14-35 mm)

Altura útil de columna	Useful height column	400 mm
Ø mín. de eje rueda	Ø min. wheel axis	14 mm
Ø máx. de eje rueda	Ø max. wheel axis	35 mm
Distancia útil entre columnas	Useful distance between columns	300 mm
Peso	Weight	6 Kg
Medidas base	Base dimensions	400 × 185 mm
Se suministra desmontada - Supplied disassembled		

US-1056/01

Conos ampliación Ø eje para equilibradora manual motocicletas Shaft Ø extension cones for manual motorcycle balance

Permite adaptar Ø de eje de rueda hasta 35 mm
Allows you to adapt wheel axle Ø up to 35 mm



JAR-214

Plataforma para desplazar motos Platform to displace motorcycles




Capacidad	600 Kg
Capacity	
Peso	48 Kg
Weight	
Medidas	2000×730×70 mm
Dimensions	
Ancho máx. de rueda	200 mm
Max. wheel width	
Largo máx. admisible	2 m
Max. admissible length	

Plataforma diseñada para maniobrar la motos y ciclomotores en lugares con poco espacio, y de forma rápida. Dispone de dos extremos que tiene la función de rampa para acceso y a su vez permite mantener frenada la plataforma a la hora de subir la moto. Platform designed to maneuver easily the motorcycle and motor-bike in small spaces. It has two extremes with the function of ramp to access and at the same time the platform allows to keep braking when the motor-bike goes up over the platform.

US-566/M

Mordaza para mesa de motos Wheel fixing for motor-bike lifts

- Mordaza de sujeción para US-566/NEW
Wheel fixing for US-566/NEW



US-566/NEW


Mesa neumática motocicletas Pneumatic motor-bike lift

Mesa neumática fabricada con el pistón de empuje ligeramente desplazado hacia el lateral, y con la plataforma de acceso abatible y desmontable. Dispone de dos puntos de anclaje para trabajar a diferente altura accionados con una palanca. La plataforma de acceso se puede fijar por medio de dos pasadores situados en los laterales de la misma. También dispone de anillas laterales para poder fijar la moto con cintas.

Pneumatic table manufactured with the pushing piston lightly moved to one side, and with reclining and detachable access platform. This manufacturing system accomplishes to have more space to place the motor-bike in and lift it or descend it easier and faster. Disposes of two mooring points to work in different heights activated with a lever. Piston with double lip seal. The access platform can be fixed by two pins located on the sides. Disposes as well of lateral rings to fix the motor-bike with ribbons.

- Capacidad - Capacity: 500 Kg
- Presión de trabajo - Work pressure: 10 bar
- Peso - Weight: 155 Kg

CE

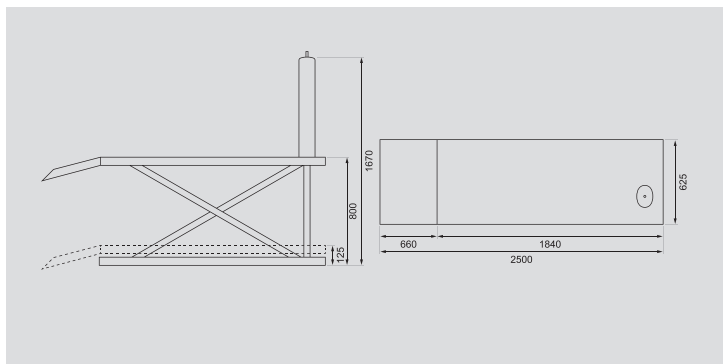

Atención: Mordaza no incluida

Attention: Wheel fixing clamp not included